Email: principal.kvkeltronnagar@gmail.com Website: https://no2cannanore.kvs.ac.in

केन्द्रीय विद्यालय संगठन

पीएम श्री केंद्रीय विद्यालय, केल्ट्रोन नगर

PM SHRI KENDRIYA VIDYALAYA KELTRON NAGAR

पि.ओ.कन्नूर विश्वविद्यालय कैंपस, P.O.KANNUR UNIVERSITY CAMPUS,
कन्नूर, ६७० ५६७ (केरला) KANNUR, 670 567 (KERALA)
(भारत सरकार शिक्षा मंत्रालय मंत्रालय के अधीन स्वायत संध्या)
(Autonomous Body Under The Ministry of Education, Govt. of India)
Tele/Fax: 0497-2780 155

F. No.31391/391/KVKN/2025-26/Quotations/(3) Dated: 11.09.2025

सूचना / NOTICE


विद्यालय में प्राथमिक बच्चों के लिए रेत के गड्ढे की स्थापना के निर्माण के लिए मुहरबंद उद्धरण आमंत्रित किए जाते हैं। कार्य का विवरण विद्यालय से कार्यालय समय 09:00 बजे से 04:00 बजे तक 12.09.2025 से 21.09.2025 तक प्राप्त किया जा सकता है या विद्यालय की वेबसाइट https://no2cannanore.kvs.ac.in/ से डाउनलोड किया जा सकता है। उद्धरण प्राप्त करने की अंतिम तिथि 22.09.2025, 03:00 बजे है।

Sealed quotations are invited for setting up of sand pit for primary children in the Vidyalaya. the details of the work can be obtained from the Vidyalaya during office hours 09:00 a.m. to 04:00 p.m. from 12.09.2025 to 21.09.2025 or can be download from the Vidyalaya website https://no2cannanore.kvs.ac.in/ . the last date for receiving the quotation is 22.09.2025, 03:00 p.m.

तोमस पी वी/Thomas P V
प्राचार्य/Principal


प्राचार्य / Principal
केन्द्रीय विद्यालय, केल्ट्रोन नगर
Kendriya Vidyalaya, Keltron Nagar
पी.ओ. कण्णूर, विधिदिद्यालय कैं
Kannur University Ca

Proposed Sand Pit Work

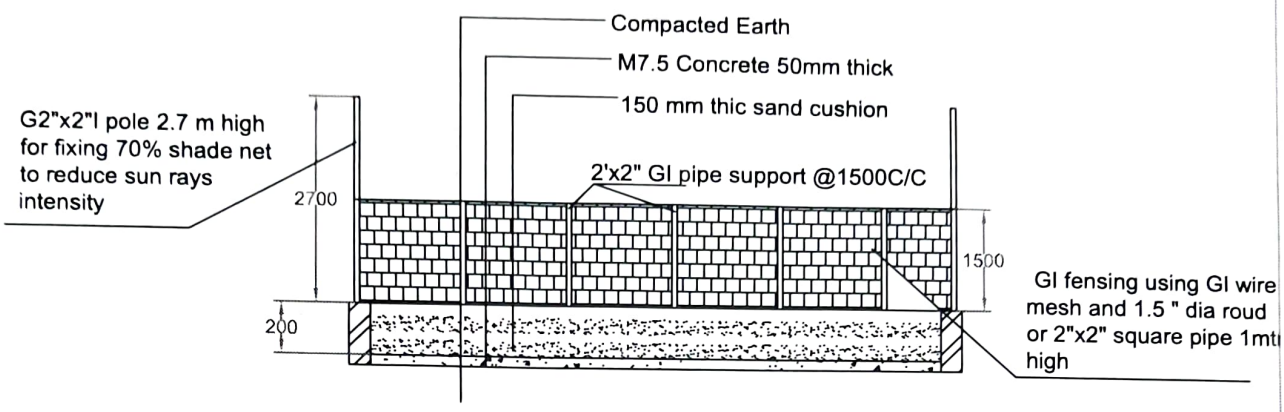

CROSS SECTION OF SAND PIT


SCALE : NTS; All Dimensions in MM

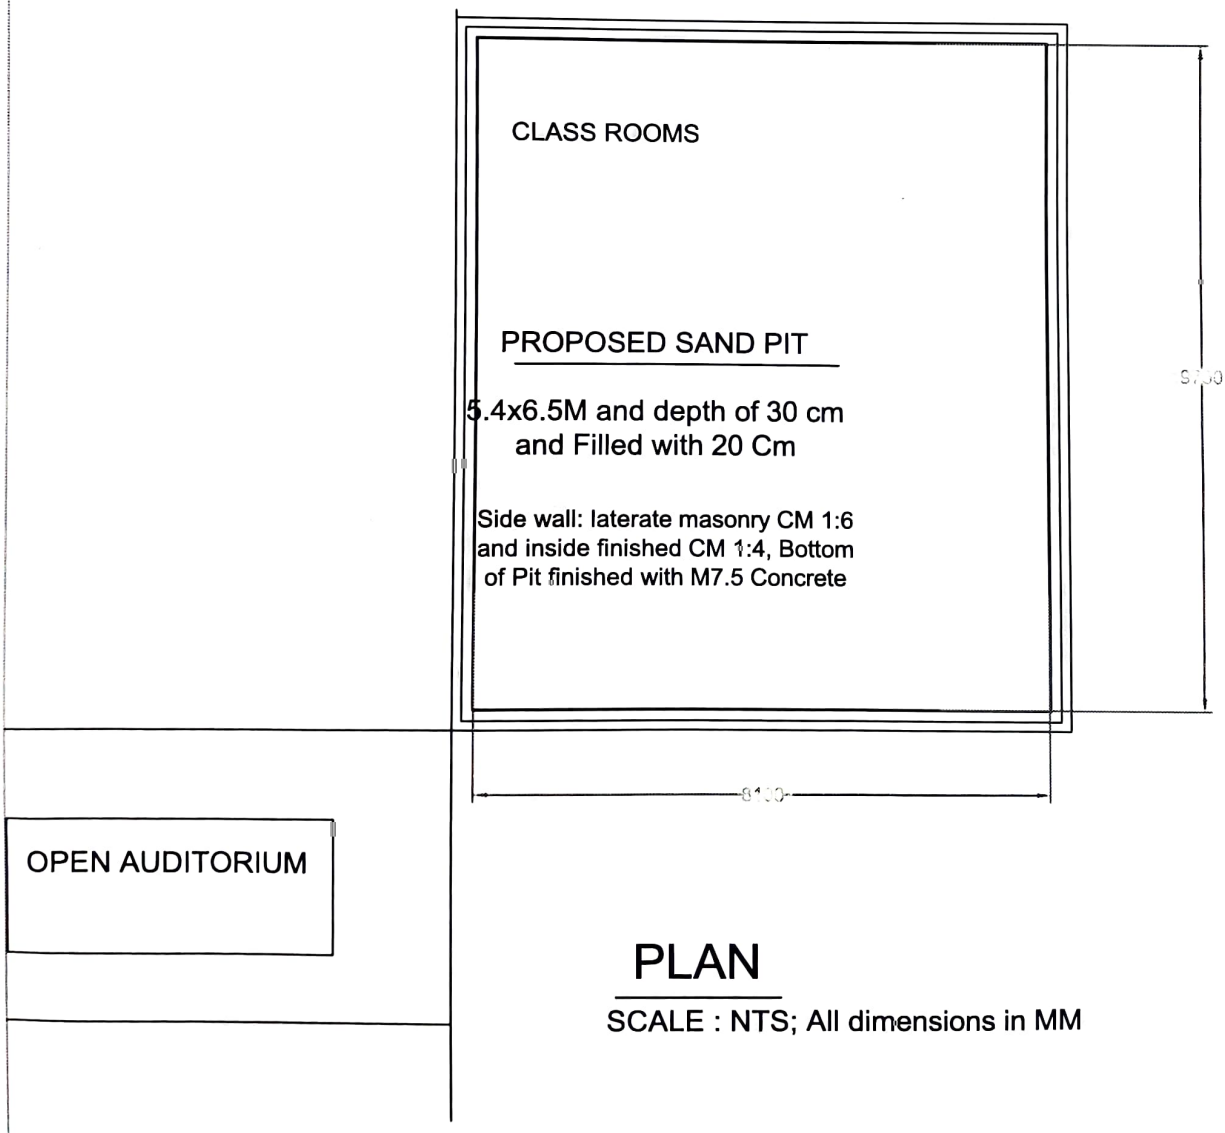

PLAN


SCALE : NTS; All dimensions in MM

PLAN OF PROPOSED CONSTRUCTION OFSAND PIT FOR STUDENTS at Kendriya Vidyalaya Keltron Nagar

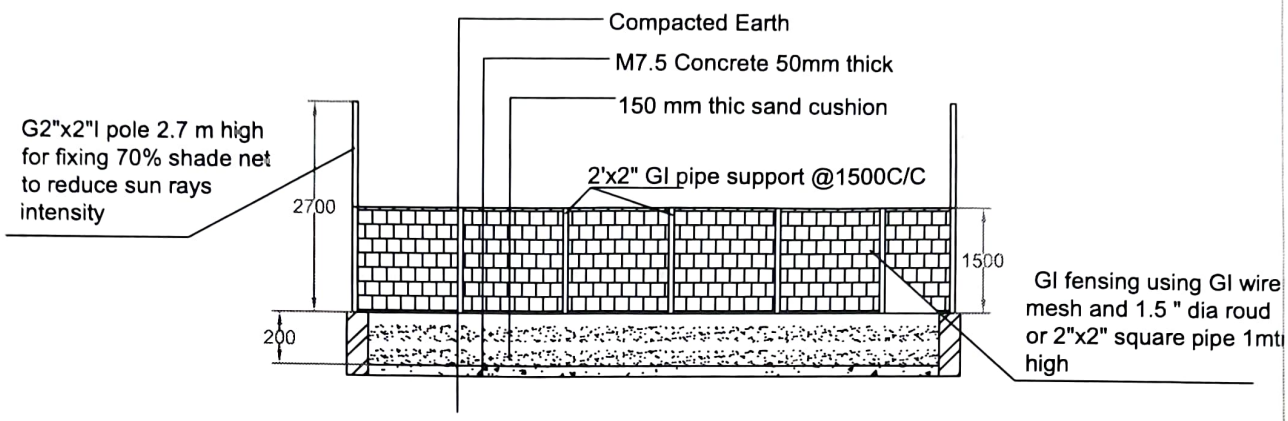

CROSS SECTION OF SAND PIT

SCALE : NTS; All Dimensions in MM

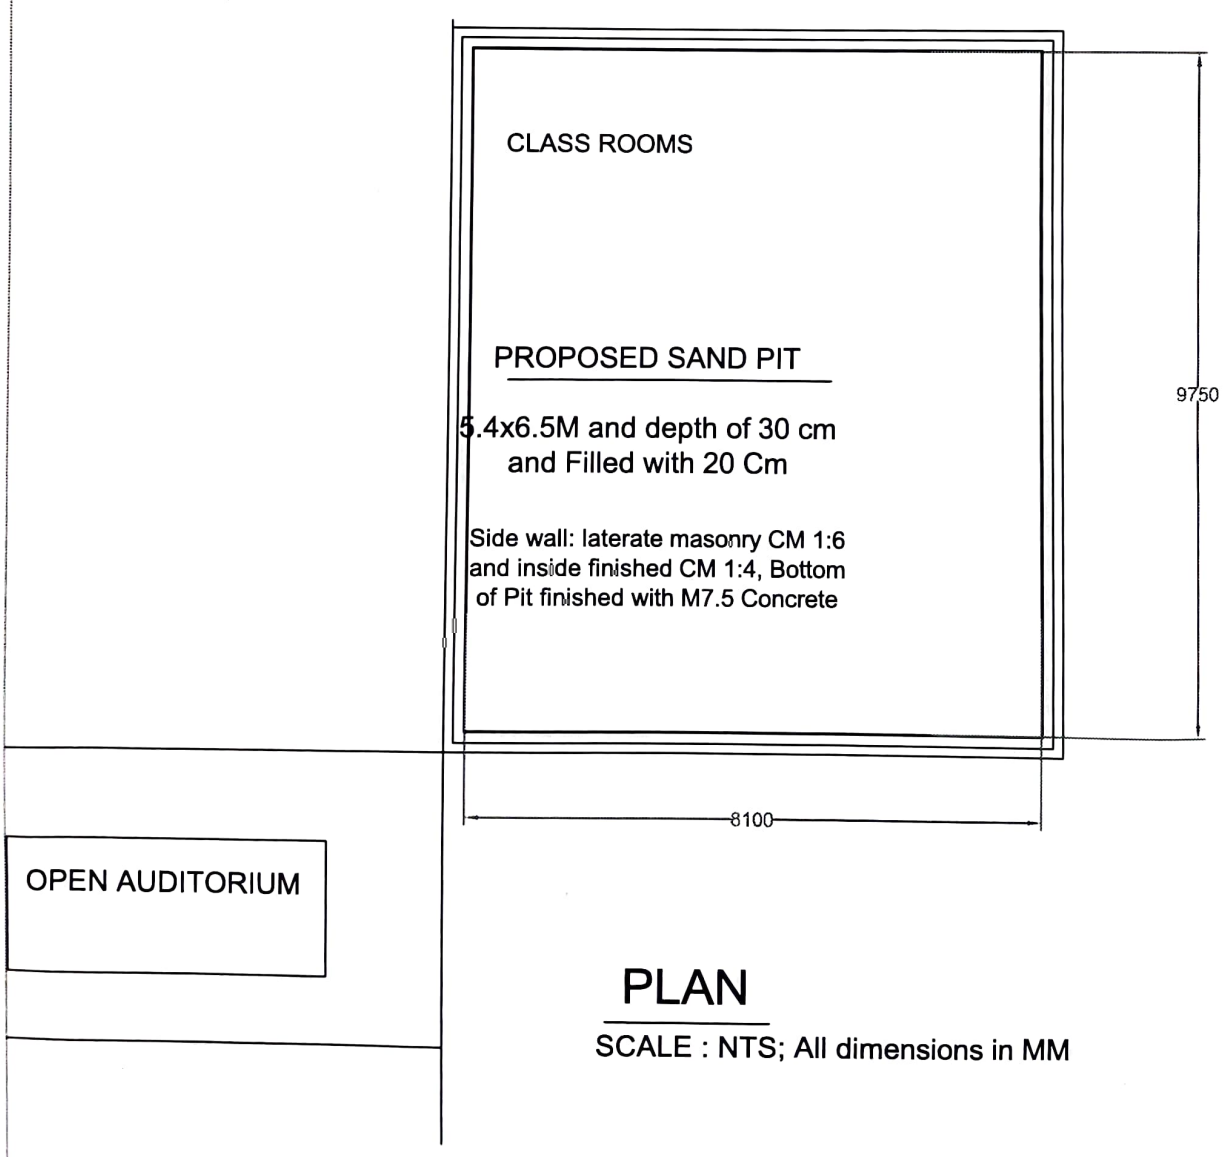

PLAN

SCALE : NTS; All dimensions in MM

PLAN OF PROPOSED CONSTRUCTION OFSAND PIT FOR STUDENTS at Kendriya Vidyalaya Keltron Nagar

PM SHRI KENDRIYA VIDYALAYA KELTRON NAGAR

Requirement for the Construction of Sand Pit

Sl. No.	CODE	Description of Work	Quantity	Unit	Amount (₹)
1	2.2.1	Earth work in rough excavation, banking excavated earth in layers not exceeding 20 cm in depth, breaking clods, watering, rolling each layer with 1/2 tonne roller or wooden or steel rammers, and rolling every 3rd and top-most layer with power roller of minimum 8 tonnes and dressing up in embankments, etc.	0.74	Cubic Metre	
2	6.2.2	Laterate work with undressed Laterate stone 35x22x20 cm in foundation and plinth in Cement Mortar 1:6 (1 cement : 6 coarse sand)	1.95	Cubic Metre	
4	4.1.3	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - 1:4:8 (cement: 2 coarse sand (zone-III): 4 graded stone aggregate 20 mm nominal size) All work up to plinth level	2.64	Cubic Metre	
5	10.16.1	Steel Work in Built-up Tubular sections (Round/Square/Rectangular hollow tubes) handrails and other works complete including Cutting, Hoisting, fixing in position, welding, and bolting with special shaped washers. Hot finished welded type tubes - GI Pipe	180	Kg	
6	Non Schedule Item (Based on DSR Item)	Supplying and spreading Sea Sand/Pit Sand in the pit at depth of 15 cm	9	Cubic Metre	
7	Non Schedule Item (Based on DSR Item)	Supplying & fixing Shade net over Tubular sections	40	Metre	

Principal

केन्द्रीय विद्यालय / KENDRIYA VIDYALAYA
दिनांक
Date.....
केलट्रोन नगर / Keltron Nagar

केन्द्रीय विद्यालय, केलट्रोन नगर
Kendriya Vidyalaya, Keltron Nagar
पी.ओ. कण्णूर, विश्वविद्यालय कॉ
P.O. Kannur University Cam