

Section A

1) ~~(A) spherical surface~~ ~~(F) plane~~ ~~surfaces~~ ~~(B) spherical~~

2) ~~(B) $1.6 \times 10^{-18} \text{ J}$~~

3) ~~(C) -0.24 nT k~~

4) ~~(D) remain stationary~~

5) ~~(B) 0.3 mB~~

6) ~~(C) 15 V~~

7) ~~(B) L is decreased and A is increased~~

8) ~~(B) γ + (B) gamma ray~~

9) ~~(B) 2~~

$\sqrt{u^2}$

$u_1 = -m\beta$

$u_2 = -m\beta_2$

$u_2 - u_1 = m\beta(1 - \frac{1}{\sqrt{2}})$

$m\beta(1 - 0.7)$
 $m\beta(0.3)$

$15 \times 10^{-3} \times 4$

$0.004 \text{ m} \times 10^{-3}$

$m_0 n^2 L A$

$m_0 \frac{N^2}{L^2} \cdot L A$

$m_0 \frac{N^2}{L^2} \cdot A$

$\frac{1}{2} m v^2 = \frac{k q}{r} \cdot \frac{2k}{\sqrt{2}}$

$r_1 = \frac{2k q}{m v^2} \approx \frac{2}{m}$

$\frac{h p}{m_2} = \frac{1 \times 10^{-9}}{1 \times 2} = 2$



r_1 r_2

$V = 10 \times$

$\sin \theta = \frac{3}{5}$

$10^{-7} \text{ idl sin } \theta$

$10^{-7} (5) (2 \times 10^{-9}) \times \frac{3}{5}$

$10^{-9} \times 10$

$2k \frac{21}{m_2} 10^{-9} \times \frac{60 \times 10^{-1}}{25}$

$\frac{k}{\sqrt{2}}$

0.24 nT

10) (c) 

11) (B) decreases by 87.5%.

12) (B) 0.05 u.

13) (D) A is false, R is also false.

14) (C) A is true, R is false.

15) (A) Both A and R are correct and R is the correct explanation of A.

16) (A) Both A and R are correct and R is the correct explanation of A.

(RM)

$$\text{Period} = \frac{2\pi R}{v} \quad \frac{mv^2}{r} = qvB$$

$$v = \frac{mv^2}{qB} \quad m = r$$

$$= \frac{2\pi m a_0 n^2}{v_0} \quad \frac{1}{n} \quad \frac{2\pi}{qB} \cdot \frac{f}{qB}$$

$$\frac{2\pi m a_0 n^3}{v_0}$$

$$\therefore P_1 = 8 \cdot \frac{(2\pi m a_0)}{v_0}$$

$$P_1 = \frac{2\pi m a_0}{v_0}$$

$$\text{decrease} = 7 \frac{(2\pi m a_0)}{v_0}$$


$$\% = \frac{7}{8} \times 100 = 87.5\%$$

(U-T-0)

Section B

(and OK)

17(b)

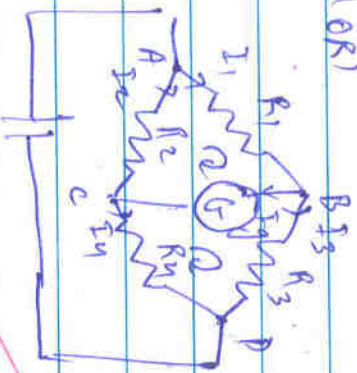

Given, $I_g = 0$.

Applying Kirchhoff's loop rule at

Junction B

$$I_1 = I_3 + I_g$$

$$\Rightarrow I_1 = I_3 \quad (\because I_g = 0) \quad \dots (i)$$

Junction C

$$I_2 + I_g = I_4$$

$$\Rightarrow I_2 = I_4 \quad (\because I_g = 0) \quad \dots (ii)$$

Applying Kirchhoff's loop rule on loop ABCDA

$$-I_1 R_1 + I_2 R_2 + 0 = 0$$

$\Rightarrow$

$$I_1 R_1 = I_2 R_2 \Rightarrow I_2 = \frac{R_1}{R_2} I_1 \quad \dots (iii)$$

Applying Kirchhoff's loop rule to BDCB

$$-I_3 R_3 + I_4 R_4 + 0 = 0$$

$$\Rightarrow I_4 R_4 = I_3 R_3$$

$$\Rightarrow \frac{I_4}{I_3} = \frac{R_3}{R_4}$$

$$\text{Since } I_2 = I_4$$

$$\text{for } I_1 = I_3$$

$$\therefore \frac{I_2}{I_1} = \frac{I_4}{I_3}$$

$$\text{or } \frac{R_1}{R_2} = \frac{R_3}{R_4}$$

which is the balanced Wheatstone bridge condition

Thus, when resistances in a Wheatstone bridge are in proportion ($R_1 = R_2$) no current flows through the central galvanometer.


(P.T.O.)

(18)

In normal adjustment,
magnification of a telescope,

$$m = \frac{f_o}{f_e}$$

$f_o \rightarrow$ focal length of objective
 $f_e \rightarrow$ focal length of eyepiece

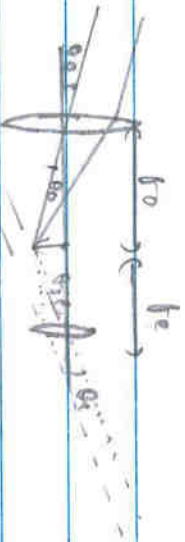

$$\left(\text{as } \frac{f_i}{f_o} \approx \frac{f_o}{f_e} \right)$$

Clearly, separation between lenses, $L \approx f_o + f_e$.

Given,
 $m = 24$

$$L = 150 \text{ cm}$$

Q. 23 $m f_o = f_o$

$\Rightarrow 24 f_o = f_o$

Also,

$f_o + f_e = 150$

$\Rightarrow 24 f_o + f_e = 150$


$\Rightarrow 25 f_o = 150$

$\Rightarrow f_e = 6 \text{ cm}$

Q. 24 $f_o = 24 f_e = 24 \times 6 = 144 \text{ cm}$


Ans $\rightarrow$ Objective focal length $= 144 \text{ cm}$

(19) (a) A simple microscope allows, in essence, an object to be brought closer to the eye than the near-point. Thus, it offers magnification.

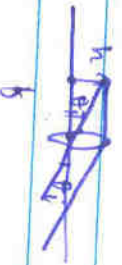

In normal adjustment,


$\theta_o \rightarrow$ 'max' angle subtended by the object.



$\rightarrow \frac{h}{D}$

$\therefore m = \frac{\theta_i}{\theta_o} = \frac{D}{b}$

When image is formed at near point:

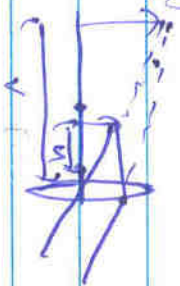

$$m = \frac{v}{u} \quad v \rightarrow -D \quad (D = 25 \text{ cm})$$

Now, $\frac{1}{v} - \frac{1}{u} = \frac{1}{f}$

$$\Rightarrow \frac{1}{v} - \frac{1}{f} = \frac{1}{u}$$

$$\therefore m = v \left(\frac{1}{v} - \frac{1}{f} \right)$$


$$= -D \left(\frac{1}{f} - \frac{1}{f} \right)$$

$$= 1 + \frac{D}{f}$$

Now, in near point adjustment, the microscope offers linear magnification also, so image is magnified even if angular size are same.

Q19 (b) Plane and convex mirrors can form real images of virtual objects

as shown.

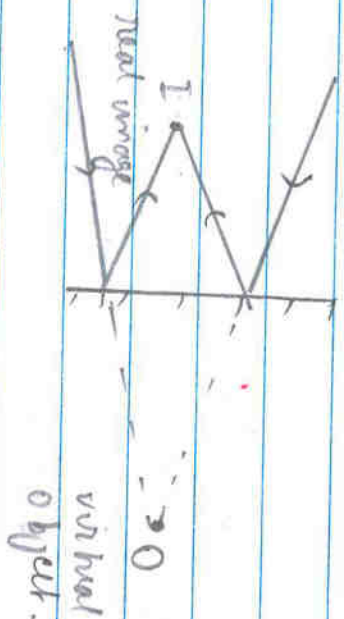

For convex lens, f is +ve.

$$\frac{1}{v} + \frac{1}{u} = \frac{1}{f}$$


$$\Rightarrow \frac{1}{v} = \frac{1}{f} - \frac{1}{u}$$

$$= \frac{u-f}{fu}$$

$$\Rightarrow v = \frac{fu}{u-f}$$

$\therefore v$ is +ve when $u > f$ and $u < f$.

(Real image is formed of virtual object.)

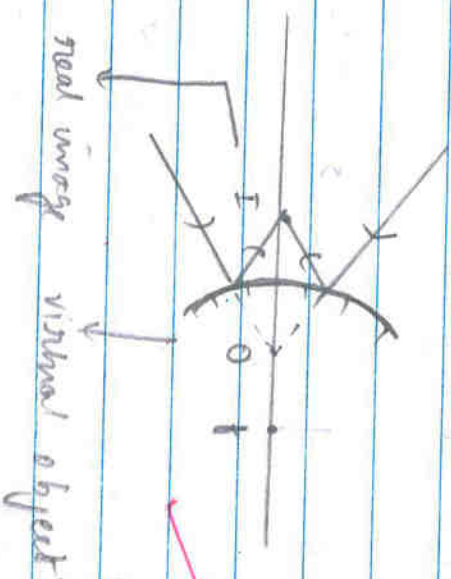

20

Intensity of light $I = 0.1 \text{ W m}^{-2}$.

Area of paper $A = 0.4 \text{ m}^2$.

$$\text{Power, } P = I A = 0.1 \times 0.4 = 0.1 \times 10^{-9} \times 0.4 \times 10^{-4} \\ = 4 \times 10^{-15} \text{ W.}$$

Avg wavelength $\lambda = 500 \times 10^{-9} \text{ m} = 5 \times 10^{-7} \text{ m}$.

Energy per photon $= \frac{h c}{\lambda}$ (J).

$\therefore$ No. of photons entering paper per second:

$$n \frac{h c}{\lambda} = 4 \times 10^{-15}$$

$$\Rightarrow n = 4 \times 10^{-8} \times \lambda$$

$$= 4 \times 10^{-8} \times 5 \times 10^{-7}$$

$\therefore$

$$2) n_2 = 4 \times 10^{-15} \times 5 \times 10^{-7}$$

$$\frac{3 \times 10^8 \times 6 \times 10^{-34}}{33}$$

$$= \frac{10}{9.9} \times 10^{-30+34}$$

$$9.9$$

$$= \frac{10}{9.9} \times 10^4$$

Explain

$$= 1.01 \times 10^4$$

$\therefore 1.01 \times 10^4$ photons enter a pupil per second (for minimum intensity)

(2)

recombination
 $n_e \rightarrow$ no. of electrons

$n_n \rightarrow$ no. of holes

In equilibrium, $n_e = n_n = n_i = 1.5 \times 10^{16}$

No. of Si atoms $\rightarrow 5 \times 10^{28} \text{ m}^{-3}$

Conc. of boron $\rightarrow 1 \text{ ppm}$

$\therefore$ No. of boron atoms $\rightarrow 5 \times 10^{28} \times 10^{-6} = 5 \times 10^{22} \text{ m}^{-3}$

$$\frac{99.99}{100} \times 100$$

We assume ^{conc.} ~~the~~ ^{holes} ~~are~~ are due to dopant atoms only.

$$n_h = 5 \times 10^{22}$$

For a doped crystal,

$$n_e n_h = n_i^2$$

$$\Rightarrow n_e (5 \times 10^{22}) = 1.5 \times 1.5 \times 10^{32}$$

$$\Rightarrow n_e = \frac{1.5 \times 1.5 \times 10^{32}}{5 \times 10^{22}}$$

$$= 0.45 \times 10^{10}$$

$$\therefore \text{conc}^n \text{ of holes} = 5 \times 10^{22} \text{ m}^{-3}$$


$$\text{conc}^n \text{ of electrons} = 0.45 \times 10^{10} \text{ m}^{-3}$$

Doping with trivalent boron creates α^- p-type crystal
($n_h \gg n_e$)

$$(1-5.0)$$

Section C

(22)

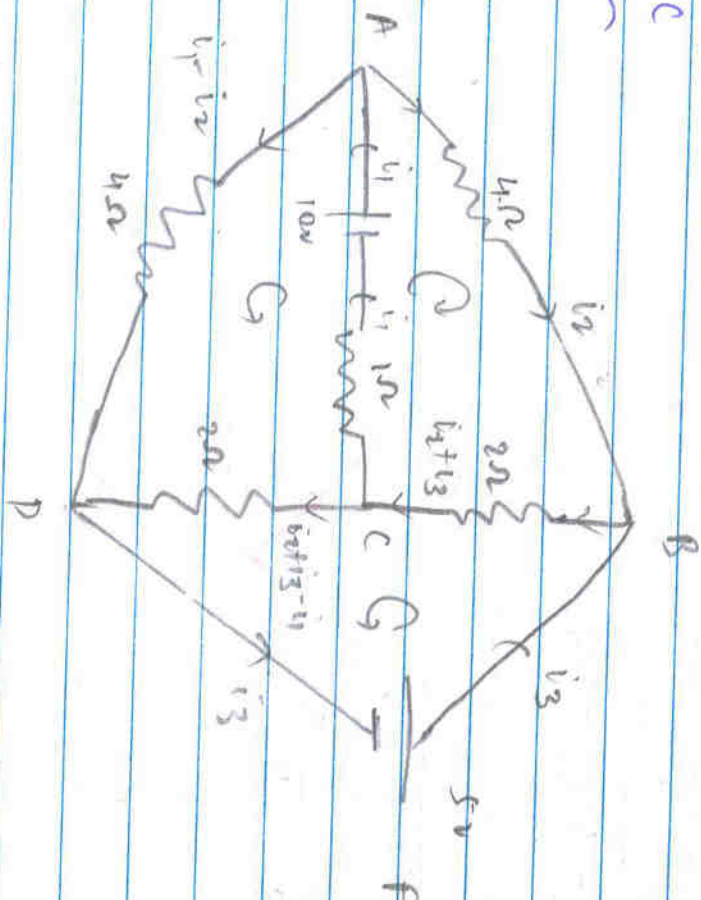

The currents are labelled as shown according to Kirchhoff's junction rule.

Applying loop rule to ABCA:

$$10 - 4i_2 - 2i_2 - 2i_3 - i_1 = 0.$$

$$\Rightarrow 10 - 6i_2 - 2i_3 - i_1 = 0$$

$$\Rightarrow 10 = i_1 + 6i_2 + 2i_3 \quad \dots (i)$$

Applying Kirchhoff's loop rule to ADCDA:

$$10 - 4i_1 + 4i_2 = 0$$

$$10 - 4(i_1 - i_2) + 2(2i_2 + i_3 - i_1) - i_1 = 0$$

$$10 - u_1 + u_2 + 2u_3 + 2u_1 - 2u_1 - 2u_1 = 0$$

$$10 = 7u_1 - 6u_2 - 2u_3 \quad \dots (ii)$$

Adding (i) and (ii)

$$20 = 8u_1 + 0 + 0$$

$$\Rightarrow u_1 = \frac{20}{8} = \frac{10}{4} = 2.5A$$

Applying loop rule to BDFB:

$$5 - 2(i_2 + i_3) - 2(i_2 + i_3 - i_1) = 0$$

$$5 - 2i_1 - 2i_3 - 2i_2 - 2i_2 - 2i_3 + 2i_1 = 0$$

$$\Rightarrow 5 = u_2 + u_3 \quad \dots (iii)$$

$$\Rightarrow 5 + u_1 = u_2 + u_3$$

$$\text{Since } i_1 = 2.5$$

$$\Rightarrow 5 + 5 = u_2 + u_3$$

$$\Rightarrow 10 = u_2 + u_3$$

$$\Rightarrow i_2 + i_3 = 2.5$$

$$\Rightarrow i_2 = 2.5 - i_3 \quad \dots (iv)$$

from (c):

$$10 = i_1 + 6i_2 + 2i_3$$

Putting $i_1 = 2.5$, $i_2 = 2.5 - i_3$

$$10 = 2.5 + 6(2.5 - i_3) + 2i_3$$

$$\Rightarrow 10 = 2.5 + 15 - 4i_3$$

$$\Rightarrow 4i_3 = 7.5$$

$$\Rightarrow 8i_3 = 15$$

$$\Rightarrow i_3 = \frac{15}{8} \text{ A.}$$

$$\therefore i_2 = 2.5 - \frac{15}{8} \text{ A.}$$

$$= \frac{20 - 15}{8} \text{ A.}$$

$$= \frac{5}{8} \text{ A.}$$

$$\text{Current in AB} \rightarrow i_2 = \frac{5}{8} \text{ A} \approx 0.625 \text{ A.}$$


$$\text{Current in AC} \rightarrow i_1 = 2.5 \text{ A}$$

$$\text{Current in BC} = i_2 + i_3 = \frac{5}{8} + \frac{15}{8} = \frac{20}{8} = 2.5 \text{ A.}$$

(Ans)

Q3

Due to current flow in one wire, a magnetic field exists. Due to this field, another current carrying wire experiences magnetic force (IBL).

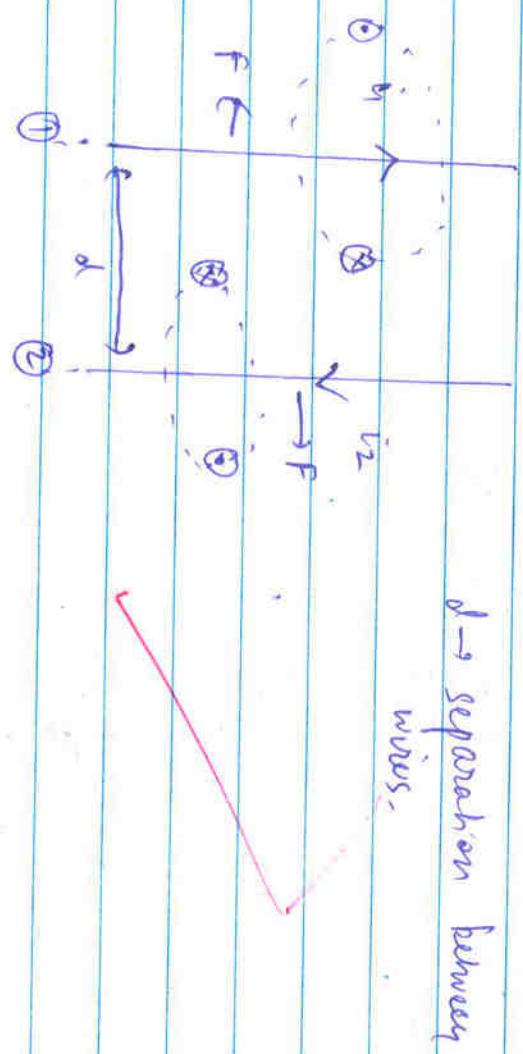

$i_1, i_2 \rightarrow$ currents in the wire

Clearly, the magnetic field due to each wire is perpendicular to the plane containing the two wires.

(A-T-6)

field due to ① or ②:

By Ampere's circuital law:

$$\oint \vec{B}_1 \cdot d\vec{l} = \mu_0 i_1$$

Amperean loop (circle) of radius d is constructed (with wire ① as axis)
 where enclosed, i_1 .

Clearly, magnetic field $\vec{B}_1$ is tangential to the loop at every point $\therefore$

$$\oint \vec{B}_1 \cdot d\vec{l} = B_1 \cdot 2\pi d.$$

$$\therefore \text{So,}$$

$$B_1 \cdot 2\pi d = \mu_0 i_1$$

$$\Rightarrow B_1 = \frac{\mu_0 i_1}{2\pi d}$$

$$\underline{2\pi d}$$

B_1 is normal to wire ②. ($\theta = 90^\circ$)

$\therefore$ Force on wire

② due to ①: (on length l)

$$F_{21} = i_2 l B_1 \sin \theta = i_2 l B_1 \quad (\theta = 90^\circ)$$

$$\Rightarrow F_{21} = \mu_0 i_1 i_2 \cdot l$$

$$\underline{2\pi d}$$

If $i_2 > i_1$ force per unit length, $f_{21} = \frac{\mu_0}{2\pi d} i_1 i_2$

By cross-product rule, the force on wire (2) is AWAY from wire (1).

Similarly, magnetic field $\vec{B}_2$ due to (2) at (1):

$$\vec{B}_2 = \frac{\mu_0 i_2}{2\pi d}$$

Force on length L of (1):

$$\begin{aligned} \vec{F}_{12} &= i_1 L \vec{B}_2 \sin 90^\circ \\ &= i_1 L B_2 \quad (\because 90^\circ) \\ &= \frac{\mu_0 i_1 i_2 L}{2\pi d} \end{aligned}$$

If $L=1$, force per unit length,

$$f_{12} = \frac{\mu_0 i_1 i_2}{2\pi d}$$

Now force is directed away from wire (2).

$$f_{21} = -f_{12}$$

$\therefore$ Force per unit length on each wire,

$$f = \frac{\mu_0 i_1 i_2}{2\pi d}$$

Currents in wires ① and ② are antiparallel. Thus, the force is repulsive since the force on one wire is directed away from the other.


(2) (a) Since current leads voltage by $\frac{\pi}{2}$ in a purely capacitive circuit,
 $\therefore X \rightarrow$ capacitor.

(b) Capacitive reactance, $X_c = \frac{1}{\omega C}$

where $C \rightarrow$ its capacitance

$\omega \rightarrow$ angular frequency of ac input

(c)

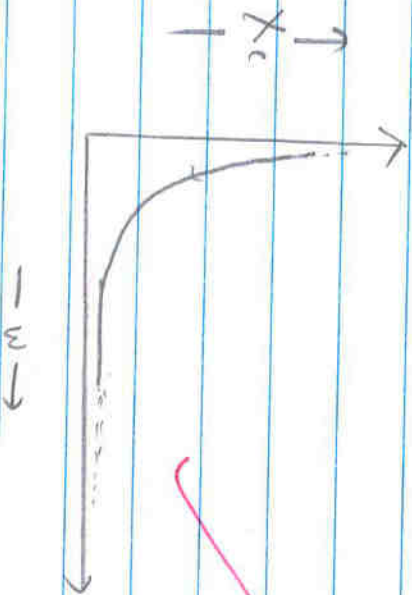

Since $X_c = \frac{1}{\omega C}$

Graph is rectangular hyperbola.

(24)

- (a) (i) In an circuit, capacitor is a non-dissipative element.
Avg power dissipation across a capacitor is zero over one cycle.

$$\text{Now, } X_C = \frac{1}{\omega C}$$

$\therefore$ For very high frequency or input, capacitor offers

negligible reactance to a signal.

Also, $i = \frac{d}{dt} \sin(\omega t + \frac{\pi}{2})$ in purely capacitive circuit.

(ii)

In the circuit, capacitor is used to store electrical energy $C \frac{1}{2} CV^2$. On applying voltage, a capacitor draws charge from the source. On complete charging, i.e., in steady state, no current flows in the capacitor even 0. Thus, it offers infinite resistance to the current in steady state.

(25)

$$\vec{E} = 6.3 \cos(1.5y + 4.5 \times 10^8 t) \text{ N m}^{-1}$$

(a) $k = 1.5 \text{ rad m}^{-1}$, $\omega = 4.5 \times 10^8 \text{ rad s}^{-1}$

Wavelength, $\lambda = \frac{2\pi}{k} = \frac{2\pi}{1.5} = \frac{2\pi \times 2}{3} = \frac{4\pi \times 2}{3} = \frac{4 \times 3.14}{3} = \frac{12.56}{3} = 4.187 \text{ m}$

$\lambda = 4.187 \text{ m}$

$\lambda = 4.187 \text{ m}$

Frequency, $\nu = \frac{v}{\lambda} = \frac{4.5 \times 10^8 \times 7}{2 \times 22}$

$= \frac{45 \times 7 \times 10^7}{44}$

$= 7.16 \times 10^7 \text{ Hz}$

(b) $E_0 = 6.3 \text{ NC}^{-1}$


we have,

$E_0 = c B_0$

$c \rightarrow \text{Speed of light in vacuum}$

$\Rightarrow B_0 = \frac{E_0}{c} = \frac{6.3}{3 \times 10^8} = 2.1 \times 10^{-8} \text{ T}$

(c) $\vec{E}$ is along $\hat{i}$ ~~also~~ velocity of wave is along $-\hat{j}$.



Since $\vec{E} \times \vec{B} \propto \vec{j}$,

$\vec{B}$ must be along $\hat{k}$.

$$\therefore \vec{B} = (2.1 \times 10^{-8} \text{ T}) \cos(1.5y + 4.5 \times 10^8 t) \hat{k}$$

or

$$\vec{B} = (2.1 \times 10^{-8} \text{ T}) [\cos(1.5 \text{ rad m}^{-1})y + (4.5 \times 10^8 \text{ rad s}^{-1})t] \hat{k}$$

(d) Bohr's first postulate: an electron in an atom ~~can~~ revolve around ~~as~~ the nucleus in certain stable orbits without the emission of radiant energy.

These energy-states of an atom are called stationary states and have definite energies.

Bohr's second postulate: an electron can revolve around the nucleus only in those orbits for which the angular momentum (L) is an integral multiple of $\frac{h}{2\pi}$. Now, the angular momentum of the revolving electron is quantized.

$$L = \frac{nh}{2\pi} \quad \therefore v = \frac{nh}{2\pi mr} \quad \dots (i)$$

$$\Rightarrow mvr = nh$$

$m \rightarrow$ mass of electron,

~~r is radius of orbit~~

$n \rightarrow$ radius of n^{th} orbit

$v \rightarrow$ orbital speed of e^- in n^{th} orbit,

Now, the electrostatic interaction with nucleus of hydrogen provides the necessary centripetal force to the electron.

Thus,

$$\frac{mv^2}{r} = \frac{1}{4\pi\epsilon_0} \cdot \frac{e^2}{r^2} \quad \text{from (i)} \quad \frac{e^2 (2\pi)^2 \cdot m^2 n^2}{4\pi\epsilon_0 \cdot n^2 h^2}$$

$$\Rightarrow mv^2 = \frac{1}{4\pi\epsilon_0} \cdot \frac{e^2}{r}$$

$$\Rightarrow \frac{1}{r} = \frac{1}{4\pi\epsilon_0} \cdot \frac{me^2}{h^2} \cdot \left(\frac{2\pi}{n}\right)^2 \cdot \frac{1}{n^2}$$

$$\Rightarrow r = \frac{1}{4\pi\epsilon_0} \cdot \frac{e^2}{mv^2}$$

$$\Rightarrow r = \frac{4\pi\epsilon_0}{me^2} \cdot \left(\frac{h}{2\pi}\right)^2 \cdot n^2$$

$$r = \frac{4\pi\epsilon_0}{me^2} \cdot h^2 \cdot n^2$$

$$\text{e) } r = \frac{4\pi\epsilon_0 h^2}{\pi m e^2} \cdot n^2$$

$\therefore$ Radius of n^{th} orbit:

$$r_n = \frac{4\pi\epsilon_0 h^2}{\pi m e^2} \cdot n^2$$

$$\text{e) } r_n = a_0 n^2$$

where $a_0 = \frac{4\pi\epsilon_0 h^2}{\pi m e^2}$ is radius of 1st orbit ($n=1$)

$$\therefore r_n = \frac{4\pi\epsilon_0 h^2}{\pi m e^2} \cdot n^2 \quad (\text{Ans})$$

CP-1-0)

27 (a) One atomic mass unit (u) is defined as one-twelfth the mass of one ^{12}C atom

Mass of one Carbon-12 atom = $1.99 \times 10^{-26} \text{ kg}$.

$$1 \text{ u} = \frac{1.99 \times 10^{-26} \text{ kg}}{12} = \frac{1}{12} \times 10^{-26} \text{ kg} \approx 0.167 \times 10^{-26} \text{ kg} = 1.67 \times 10^{-27} \text{ kg}.$$

(b) Deuteron $\rightarrow {}^2_1\text{H}$.

Total mass of protons = $1 \times 1.007825 \text{ u} = 1.007825 \text{ u}$

Mass of 1 neutron = $1 \times 1.008665 \text{ u} = 1.008665 \text{ u}$

Total mass (mp + mn) = $m = 2.016490 \text{ u}$

Mass of deuteron, $m(D) = 2.014102 \text{ u}$.

$\therefore$ mass defect = $m - m(D)$

$$\Delta m = 2.016490 - 2.014102 = 0.002388$$

1.007825	174520
1.008665	174520
2.016490	279450
931.5 MeV	279450
0.002	18630
27.315	2220
0.002	2220
0.2388	
174520	
174520	
279450	
279450	
18630	
2220	

Energy equivalent of 1 u = $1 \text{ u} \times c^2$

$$= 1.67 \times 10^{-27} \times 9 \times 10^{16} \text{ J}$$

$$= 1.6 \times 10^{-19} \times 9 \times 10^6 \text{ eV}$$

$$= 931.5 \text{ MeV}$$

$$\begin{array}{r} 1.6 \\ \times 931.5 \\ \hline 1334 \\ 1474 \\ \hline 1510.4 \end{array}$$

∴ Energy required to separate

a deuteron into free nucleons = $\Delta m c^2$

(Binding energy)

$$= \Delta m \times 931.5 \text{ MeV}$$

$$= 0.002388 \times 931.5$$

$$= 2.224 \text{ MeV}$$

$$\begin{array}{r} 0.002388 \\ \times 931.5 \\ \hline 2.224 \end{array}$$

$$= 2.224 \times 10^6 \times 1.6 \times 10^{-19}$$

$$= 3.558 \times 10^{-13} \text{ J}$$

$$\approx 3.56 \times 10^{-13} \text{ J}$$

∴ Required energy =


$$2.224 \text{ MeV}$$

$$\approx 3.56 \times 10^{-13} \text{ J}$$


(18) (b) Energy band diagrams:

Here, $E_c \rightarrow$ conduction band, $E_v \rightarrow$ valence band
 $E_g \rightarrow$ Energy gap (forbidden gap)

For metals

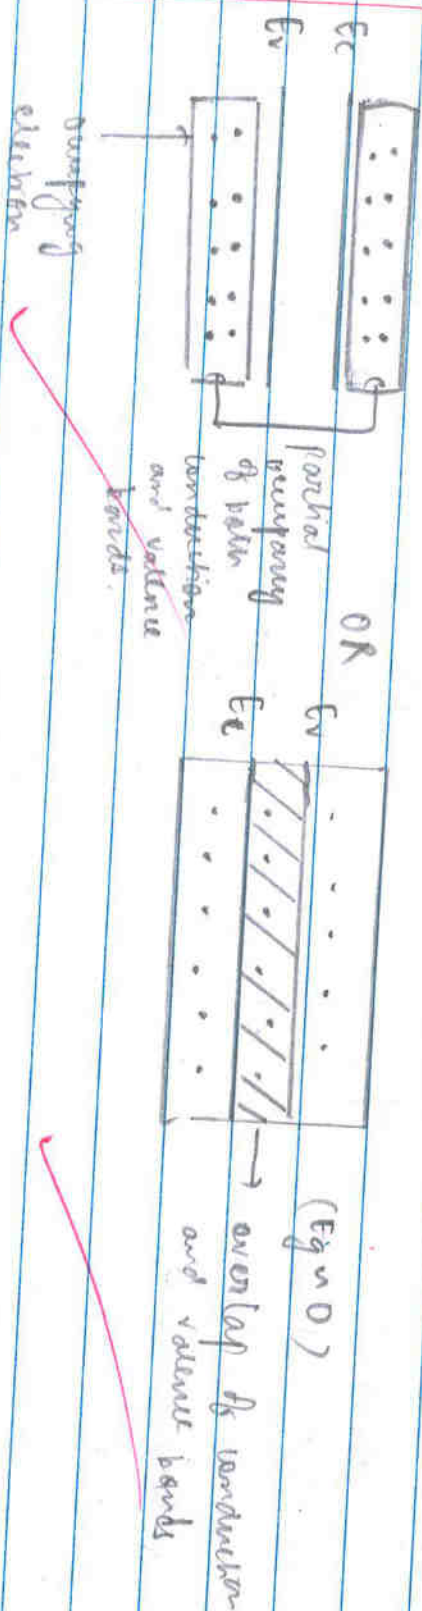

For insulators:

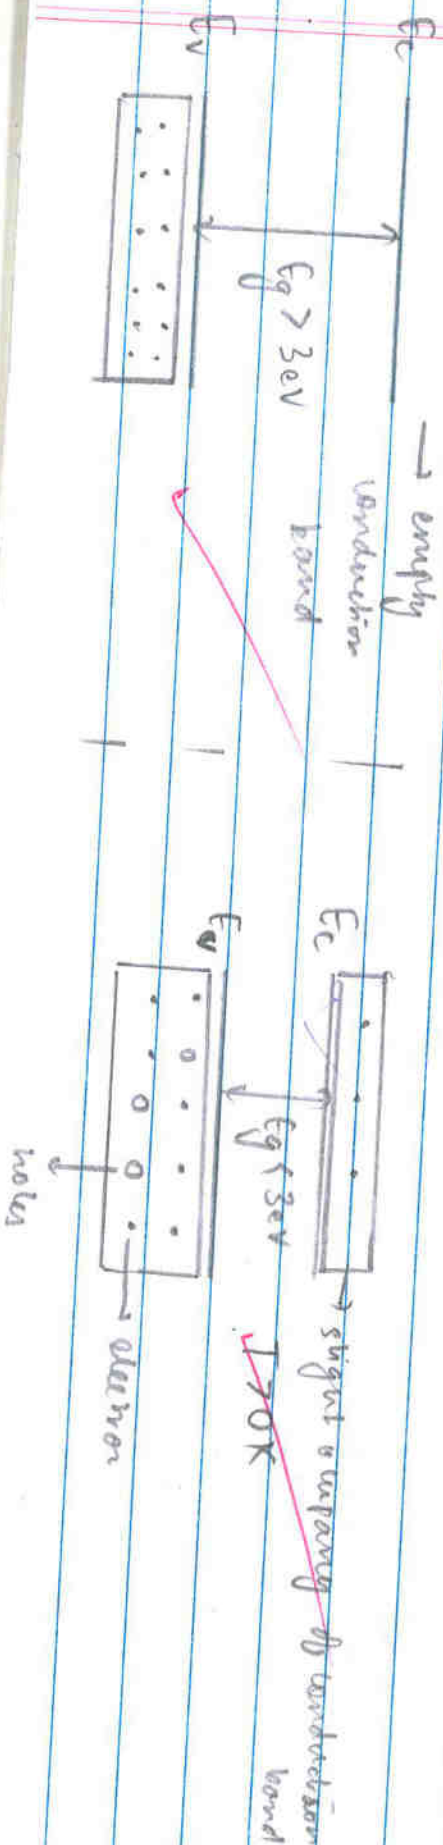

Metals

- Either both conduction and valence bands are partially filled, or conduction and valence bands overlap, so that band gap, $E_g = 0$
- Metals are thus good conductors of electricity.
- ~~with partial overlapping of conduction band at 0K~~ ~~even when $E_g = 0$.~~

Al, Cu

- Low resistivity, high conductivity.

Eg. copper.

Insulators

- Here, band gap $E_g > 3 \text{ eV}$. Electrons cannot be normally excited from valence band to conduction band by raising temperature.
- No electrons in conduction band, hence these do not conduct.
- High resistivity, low conductivity.

Eg. air

Semiconductors,

- Band gap, $E_g < 3 \text{ eV}$. At adequate temperatures electrons excite to conduction band, leaving vacancies in the valence band.
- At 0K, semiconductors are insulators since conduction band is empty.
- At $T > 0^\circ \text{C}$, there conduct due to flow of electrons in conduction band and holes in valence band.
- Intermediate resistivity between metals and insulators.

Eg, Silicon.

Section D

(29) (c) (D) IV ✓

$$a = 2 \text{ nm}$$

$$d = 6 \text{ pm}$$

$$\frac{1}{e} \frac{1}{e} \frac{1}{e}$$

(iv) (D) ~~accelerate along -i~~ ✓

$$W = 2 \lambda d$$

$$\frac{W}{a}$$

$$V > E d.$$

$$V - V_0 = E d.$$

(iii) (A) ~~$V = V_0 + \lambda \eta$~~ ✓

$$w = \frac{\lambda}{d}$$

$$V = V_0 + E d.$$

$$\leq V_0 + \frac{1}{d} d.$$

(iv) (a) (c) ~~$\epsilon_4 > \epsilon_3 > \epsilon_2 > \epsilon_1$~~ ✓

$$\frac{2 \lambda}{a} = \frac{n \lambda}{d}$$

$$V_0 + \frac{1}{d} d.$$

(30)

(c) (D) 6 ✓

$$\frac{2 d}{a} = n.$$

(ii) (c) 3 ✓

$$V = E$$

(iii) (c) 6 ✓

$$\frac{2 \times 6}{2}$$

$$\epsilon_1 = 20$$

(iv) (D) 10 ✓

$$2 \lambda = n \lambda$$

$$\frac{2 d}{a} = n$$

$$n = \frac{2 d}{a}$$

$$\epsilon_2 = 200$$

$$\frac{2 d}{a} = n$$

$$\frac{2 d}{a}$$

$$\epsilon_3 = 220$$

$$\epsilon_4 = 300$$

$$\Rightarrow \frac{2 \times 6}{2}$$

$$\frac{1 \times 2 d}{2 a}$$

$$\epsilon_4 > \epsilon_3$$

$$n \geq 6.$$

$$\frac{1 \times 2 d}{2 a}$$

$$\frac{1 \times 2 d}{2 a}$$

Section E

(31)

(b)(c)

corr.



(i)

$R \rightarrow$ radius of spherical shell

$Q \rightarrow$ charge

Let $\sigma = \frac{Q}{A} = \frac{Q}{4\pi R^2}$ (surface charge density)

$q = 2\pi R D$

$0.5 \times d = n$

$D \times 2$

$\frac{1 \times 10^{-6} \times 2}{2} = n$

$\frac{2 \times 10^{-6} \times 2}{2} = n$

2×10^{-6}

10^3

200

20×10^3

> 10

We consider a spherical gaussian surface of radius $r < R$.

Charge enclosed by sphere $= 0$.

By Gauss' law

Electric flux, $\Phi_E = \frac{q_{\text{enclosed}}}{\epsilon_0} = 0$.

$\Phi_E = \vec{E} \cdot \vec{A}$

$\Rightarrow 0 = E \cdot A$

$\therefore E = 0$ (Since $E \neq 0$ and $\cos \theta = 1$)

Electric field, E inside the shell $= 0$


$E = \frac{Q}{4\pi\epsilon_0 R^2}$

(ii) We consider a Gaussian surface with radius $r > R$.

Then electric flux, Φ_e through the surface,

$$\Phi_e = \oint \vec{E} \cdot d\vec{s}$$

$$= E \cdot 4\pi r^2$$

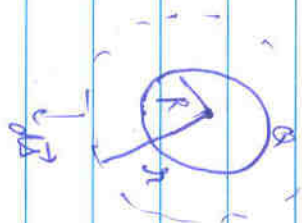

Since the electric field is normal to the ~~area~~ surface.

(taken in along the area vector) at every point
($\therefore \theta = 0^\circ$, $E \cos 0^\circ = EA$)

③ Total charge enclosed : ~~area~~ Q .

$\therefore$ Electric field at r from centre:

~~area~~

By Gauss' law,

$$E 4\pi r^2 = \frac{Q}{\epsilon_0}$$

$$\Rightarrow E = \frac{Q}{4\pi\epsilon_0 r^2}$$


(radiating outward)

$\therefore$ Electric field, $E_{\text{outside}} = \frac{Q}{4\pi\epsilon_0 r^2}$ ($r > R$)
($r < R$)

2024

31 (b) (a) For a non-conducting infinite sheet:

Surface charge density $= \sigma$.

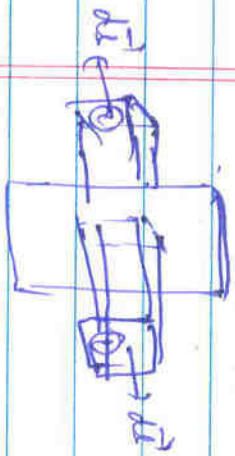

We consider a Gaussian parallelepiped.

Electric field is along the lateral surfaces.

$\therefore$ Electric flux, Φ through lateral surfaces $= 0$.

Now, $\vec{E}$ is normal to the cross-sections of the parallelepiped. Let A be cross sectional area.

Flux through surface ① $\rightarrow EA$ (outward)

And $\Phi_2 \rightarrow EA$ (outward)

Total flux, $\Phi = \Phi_1 + \Phi_2$


$$= 2EA$$

By Gauss' Law,

$$\Phi = \frac{q_{\text{enclosed}}}{\epsilon_0}$$

$$2EA = \frac{\sigma A}{\epsilon_0}$$

$$\therefore E = \frac{\sigma}{2\epsilon_0}$$



Next, we consider a conducting surface, with some surface charge density σ . We consider an elemental gaussian cylinder.

Field is along the curved surface, $\therefore$ flux through curved surface $= 0$

Flux through surface $1 \rightarrow EA$ $\therefore E$ is along ds

where $A \rightarrow$ area of cross section.

Net charge E is zero inside a conductor

$$\therefore \phi_2 = 0$$

$$\therefore \text{Total flux, } \phi = EA - (0) = EA$$

By Gauss' Law,

$$\phi = 0 \text{ enclosed}$$

$$\Rightarrow EA = \frac{\sigma A}{\epsilon_0}$$

$$\Rightarrow E = \frac{\sigma}{\epsilon_0}$$


Electric field

outside conductor (charged) $\rightarrow \frac{\sigma}{\epsilon_0}$

outside non-charged non-conducting plate $\rightarrow \frac{\sigma}{2\epsilon_0}$

Clearly, the magnitude of electric field is double for the conducting plate ✓

Q2 (or) Q3

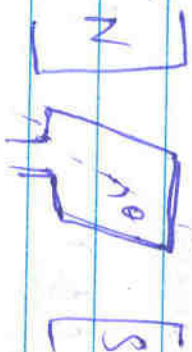

Let A be the area of coil.
 $\omega \rightarrow$ angular speed.
 Let $\theta = \omega t$ so that $\theta = 0$ at $t = 0$.

$\vec{B}$ (uniform magnetic field)

By Faraday's law of electromagnetic induction,
 Induced emf, $\epsilon = -N \frac{d\Phi_B}{dt}$ ✓

magnetic

flux $B \cos \theta$ through coil $= \vec{B} \cdot \vec{A} = BA \cos \theta$
 $= BA \cos \theta$

$\therefore \frac{d\phi}{dt} = -N \frac{d}{dt} BA \cos \theta$

$= -NBA \frac{d \cos \theta}{dt}$


$= NBA \sin \theta \frac{d\theta}{dt}$

$\therefore$ Induced $\mathcal{E} = NBA \sin \theta \frac{d\theta}{dt}$

where $\mathcal{E} = \mathcal{E}_0 \sin \theta$

where $\mathcal{E}_0 = NBA \frac{d\theta}{dt}$ (constant in the given case)

(ii)



$r_1 = 1 \text{ cm}$, $r_2 = 100 \text{ cm}$
 velocity, $u = 77 \text{ m/s}$

Find magnetic field due to current carrying loop

$B = \frac{\mu_0 i R}{2(R^2 + x^2)^{3/2}}$

Let current i flow through L_2

$$\therefore \text{Bar where } \Phi L_2 = \frac{\mu_0 i}{2r_2}$$

Since $r_2 \gg r_1$, the magnetic field can be assumed to be constant throughout L_1 .

$\vec{B}$ is normal to the plane containing the loops.

$\therefore$ magnetic flux through L_1 is

$$\Phi = \oint \vec{B} \cdot d\vec{A} \quad [\because \theta = 0^\circ, \vec{\Phi}, \vec{B} \text{ is along } \vec{A}]$$

$$\Rightarrow \Phi_{B_1} = \frac{\mu_0 i \pi r_1^2}{2r_2}$$

$$\therefore \Phi_{B_1} = \frac{\mu_0 \pi r_1^2}{2r_2} \cdot i$$

But flux linked to L_1 is

$$\Phi_1 = M_{12} i_2$$

where $M_{12} \rightarrow$ mutual inductance of L_1 with L_2

$$\therefore M_{12} = \frac{\mu_0 \pi r_1^2}{2r_2}$$

We know,

$$\mu_2 = \mu_1 = \mu.$$

$$\therefore \mu = \mu_0 \pi y^2$$

$$2\mu.$$

$$\mu = \mu_0 \pi y^2 = 2\pi \times 10^{-7} \cdot 0.1 \times 10^{-4}$$

$$2 \times 10^{-11}.$$

$$2 \pi \times 10^{-11}$$


$$2 \times 10^{-11}$$

$$2 \times 10^{-10}$$

$$\therefore \text{Mutual inductance} = 2 \times 10^{-10} \text{ H.}$$

(PT-01)

(33) (a) (i)

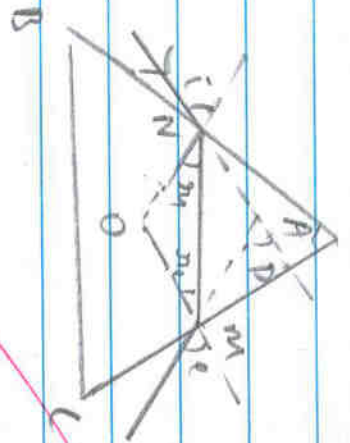

A $\rightarrow$ angle of incidence from

i $\rightarrow$ angle of incidence

$r_1 \rightarrow$ angle of refraction at 1st interface

$r_2 \rightarrow$ angle of incidence at second interface

DE $\rightarrow$ angle of emergence

D $\rightarrow$ angle of deviation

$N_1, M_1 \rightarrow$ normals to the interfaces

By geometry,

$$D = \angle DNM + \angle DMN \quad (\text{external angle})$$

$$D = i - r_1 + e - r_2$$

$$D = i + e - (r_1 + r_2)$$

In quadrilateral ANOM

$$\angle A + \angle ANO + \angle AMO + \angle NOM = 360^\circ$$

$$\rightarrow \angle A + 180^\circ + \angle NOM = 360^\circ$$

$$\rightarrow \angle A = 180^\circ - \angle NOM$$

In $\triangle NOM$,


$$r_1 + r_2 + \angle NOM = 180^\circ$$

$$r_1 + r_2 = 180^\circ - \angle NOM$$

$\therefore A = m_1 + m_2$


e) $D = i + e - A$

when $D = D_m$ (angle of minimum deviation)
 $i = e$ and $D_m = i - A$

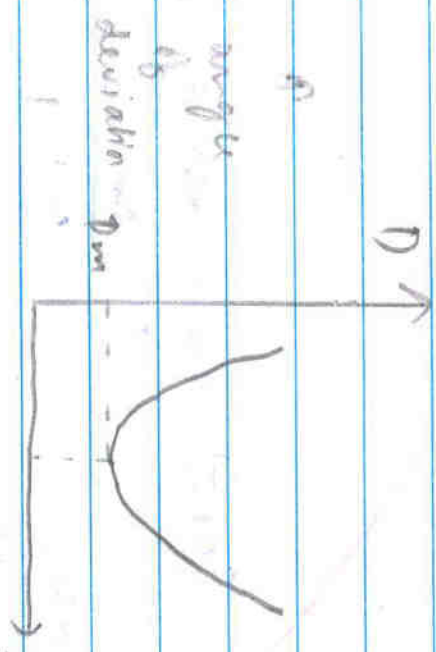

angle of incidence $\rightarrow$

(ii)

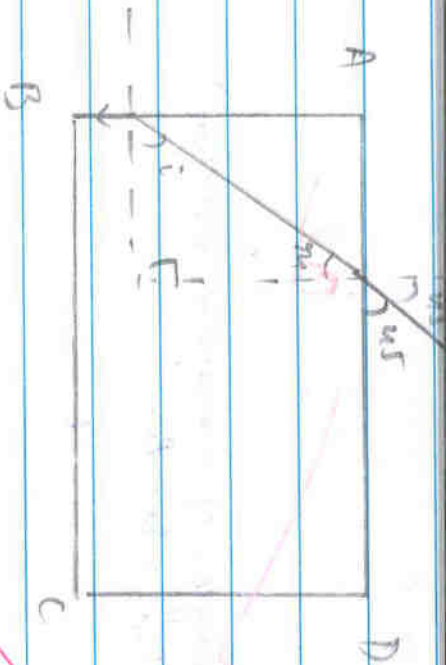

as 90° (given)

By Snell's law,

$$\frac{\sin i}{\sin r} = n_2$$

($n_2 \rightarrow$ refractive index of liquid water)

$$\therefore \sin i = n_2 \cdot \sin r$$

$$\Rightarrow \sin r = \frac{\sin i}{n_2}$$

$$= \frac{1}{\sqrt{2} n_2}$$

By geometry,

$$i + r = 90^\circ$$

$$\Rightarrow i = 90^\circ - r$$

$$\Rightarrow \sin i = \sin(90^\circ - r) = \cos r$$

$$\Rightarrow \left| \frac{1}{\sqrt{2} n_2} \right| = \left| \frac{1}{2 n_2} \right|$$
$$\Rightarrow \frac{1}{\sqrt{2} n_2} = \frac{1}{2 n_2}$$
$$\Rightarrow \frac{1}{\sqrt{2}} = \frac{1}{2}$$
$$\Rightarrow \frac{1}{\sqrt{2}} = \frac{\sqrt{3}}{2}$$

$$\Rightarrow \sin i = \frac{1}{n_2}$$

$\therefore$ Refractive index of liquid

$$\Rightarrow \cos r = \frac{1}{n_2}$$

$$= \frac{\sqrt{3}}{2}$$

$$\Rightarrow \sqrt{1 - \sin^2 r} = \frac{1}{n_2}$$

$$\Rightarrow \sqrt{1 - \frac{1}{4 n_2^2}} = \frac{1}{n_2}$$

$$\Rightarrow \left| \frac{1}{\sqrt{2} n_2} \right| = \left| \frac{1}{2 n_2} \right|$$
$$\Rightarrow \frac{1}{\sqrt{2} n_2} = \frac{1}{2 n_2}$$
$$\Rightarrow \frac{1}{\sqrt{2}} = \frac{1}{2}$$
$$\Rightarrow \frac{1}{\sqrt{2}} = \frac{\sqrt{3}}{2}$$